


POLYSTEP® P-12A

a primary emulsifier for use in emulsion polymerization systems

POLYSTEP P-12A is a tridecyl ethoxylate phosphate ester, ammonium salt for use in emulsion polymerization. When compared to an alkyl phenol ethoxylate (APE) type phosphate ester as the primary emulsifier, **POLYSTEP P-12A** can improve performance attributes in both the emulsion polymerization process and downstream coating applications.

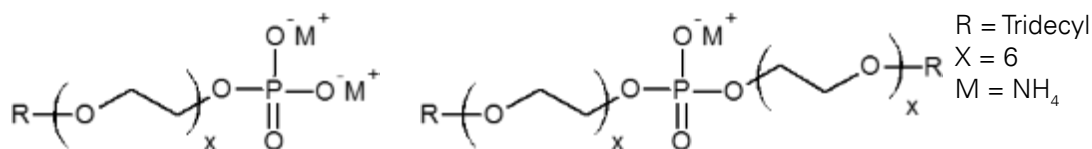

Key Attributes:

- ✓ Low coagulum formation in small particle latexes
- ✓ Improves color acceptance
- ✓ Improves mechanical stability
- ✓ Improves washability
- ✓ Alkyl phenol ethoxylate (APE) free
- ✓ Improves RT¹ block resistance

Latex Performance

Polymer	52BA/46MMA/2MAA	
Surfactant	POLYSTEP P-12A	NP-6PE
Level BOM, %	1.5	1.5
Final PSD, nm	113	111
Ca ²⁺ Stability, g 10% CaCl ₂	8.5	8.4
Shear Stability, min	6.0	4.0
Heat Stability, 49°C for 30 days	Pass	Pass

BA = Butyl Acrylate MMA = Methyl Methacrylate MAA = Methacrylic Acid

POLYSTEP P-12A is comparable to a nonyl phenol (POE-6) phosphate ester (NP-6PE) as the sole primary emulsifier in an acrylic polymer (T_g = 2°C) stabilized with MAA and no additional post-additive latex stabilizers.

POLYSTEP P-12A provided comparable results in the emulsion polymerization process and resulting latex as NP-6PE.


¹RT = Room temperature

The coatings containing **POLYSTEP P-12A** and NP-6PE do not contain any additional wetting agents added to the paint formulation. The examples that follow show how the choice of surfactant in the latex impacted coating applications.

Color Acceptance

POLYSTEP P-12A improved performance for red iron oxide and provided equivalent performance to NP-6PE for carbon black color acceptance.

<50 g/L VOC, PVC = 29.8%, Volume Solids = 33.7%

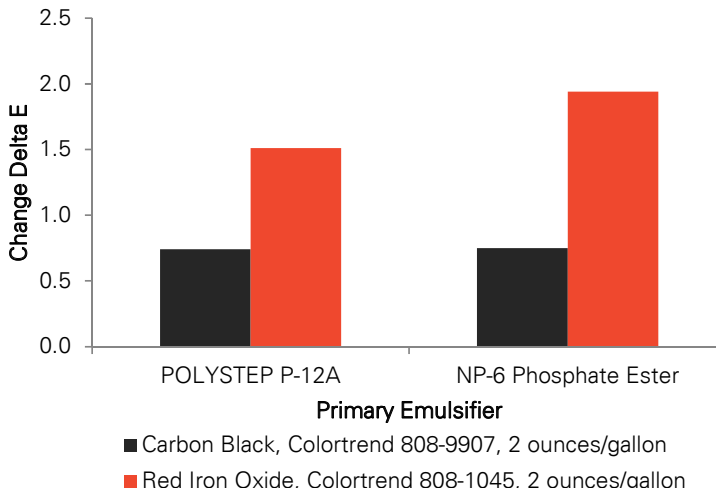


Washability

POLYSTEP P-12A improved #2 pencil stain removal compared to NP-6PE and provided comparable red lipstick removal.

ASTM D4828

<50 g/L VOC, PVC = 29.8%, Volume Solids = 33.7%

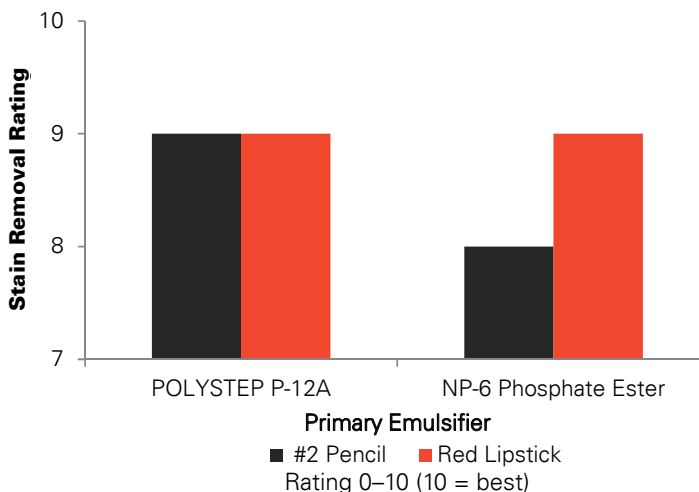


Block Resistance

POLYSTEP P-12A improved 1-day and 7-day RT block resistance compared to NP-6PE.

ASTM D4946

<50 g/L VOC, PVC = 29.8%, Volume Solids = 33.7%

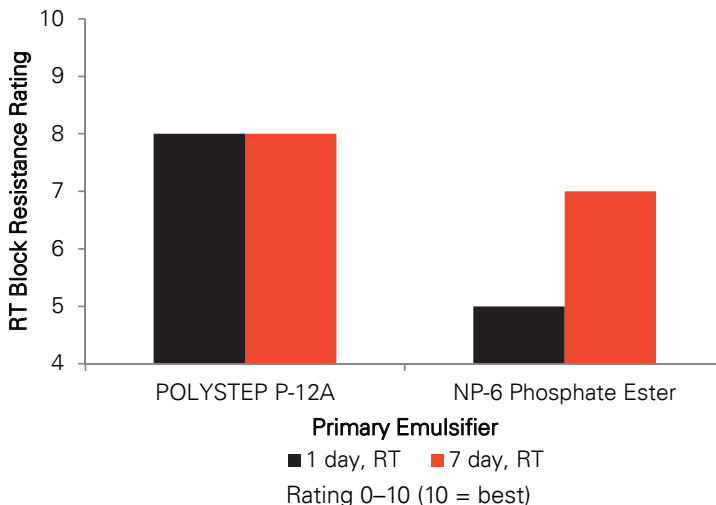

2018 © Stepan Company. All Rights Reserved.

POLYSTEP® is a registered trademarks of Stepan Company.

The information contained herein is based on the manufacturer's own study and the works of others and is subject to change without prior notice. The information is not intended to be all-inclusive, including as to the manner and conditions of use, handling, storage or disposal or other factors that may involve additional legal, environmental, safety or performance considerations. Nothing contained herein grants or extends a license, express or implied, in connection with any patents issued or pending of the manufacturer or others, or shall be construed as a recommendation to infringe any patents. STEPAN COMPANY MAKES NO PRODUCT WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR USE, EXPRESS OR IMPLIED, AND NO OTHER WARRANTY OR GUARANTY, EXPRESS OR IMPLIED, IS MADE, INCLUDING AS TO INFORMATION REGARDING PERFORMANCE, SAFETY, SUITABILITY, STABILITY, ACCURACY, COMPLETENESS, OR ADEQUACY. Stepan Company (and its employees, subsidiaries and affiliates) shall not be liable (regardless of fault) to the vendee, its employees, or any other party for any direct, indirect, special or consequential damages arising out of or in connection with the accuracy, completeness, adequacy, furnishing, use, or reliance upon information provided herein. The vendee assumes and releases Stepan Company (and its employees, subsidiaries and affiliates) from all liability, whether in tort, contract or otherwise to the fullest extent possible under the relevant law.

February 2018

