

Stepan 

Alkoxylates

**Collaborative Chemistry.
Creative Solutions.**



MAKON[®] UD-Series



MAKON UD-Series


Stepan Company's **MAKON UD-Series** can be used to formulate a wide variety of products including degreasers, hard surface cleaners, industrial and institutional (I&I) laundry and other functional applications. These C11 branched alcohol ethoxylates are very effective wetting agents, demonstrate fast foam decay and are easy to handle.

Tradename	Applications	HLB
MAKON UD-5	I&I Cleaning, Wetting Agent	10.9
MAKON UD-6	I&I Cleaning, Wetting Agent	11.9
MAKON UD-7	I&I Cleaning, Fragrance Solubilizing, I&I Laundry, Wetting Agent	12.8
MAKON UD-8	Fragrance Solubilizing, Wetting Agent	13.2

Rapid Wetting

The **MAKON UD-Series** of products are fast wetters due to their branched carbon chain. They are faster wetters than nonylphenol ethoxylates (NPE) and tridecyl alcohol ethoxylates (TDA).

Draves Wetting at 25°C

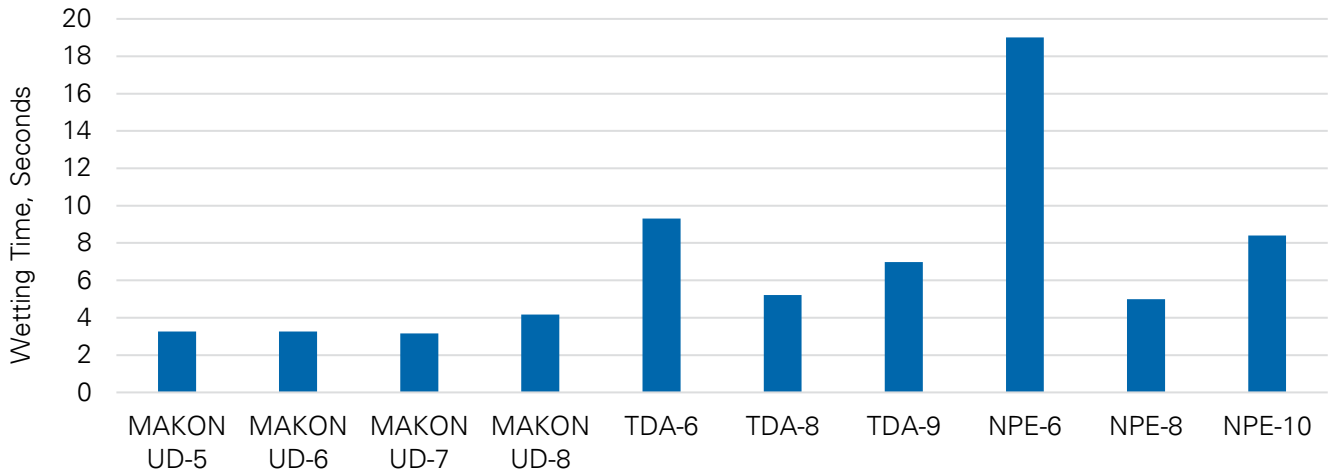

Method: Draves wetting, ASTM D2188-10, 0.1 wt% in deionized water

Ease of Use

MAKON UD-7 and **MAKON UD-8** do not go through a gel phase in water, making them well-suited for high concentrate formulations.


Liquid
 Gel
 Partial Gel
 Insoluble

Wt% in Water	10	20	30	40	50	60	70	80	90
MAKON UD-5	Insoluble	Insoluble	Insoluble	Liquid	Liquid	Partial Gel	Partial Gel	Liquid	Liquid
MAKON UD-6	Liquid	Liquid	Liquid	Liquid	Liquid	Partial Gel	Partial Gel	Liquid	Liquid
MAKON UD-7	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
MAKON UD-8	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid	Liquid
TDA-8	Liquid	Liquid	Liquid	Liquid	Liquid	Partial Gel	Partial Gel	Partial Gel	Liquid
TDA-9	Liquid	Liquid	Liquid	Liquid	Liquid	Partial Gel	Partial Gel	Partial Gel	Liquid
NPE-8	Liquid	Liquid	Liquid	Liquid	Liquid	Gel	Gel	Gel	Liquid
NPE-9	Liquid	Liquid	Liquid	Gel	Gel	Partial Gel	Partial Gel	Liquid	Liquid

Method: 25°C gel phase in deionized water

Foam Profile


The **MAKON UD-Series** of products have good initial foam height with fast foam break. This quality is useful in applications such as industrial clean-in-place and laundry.

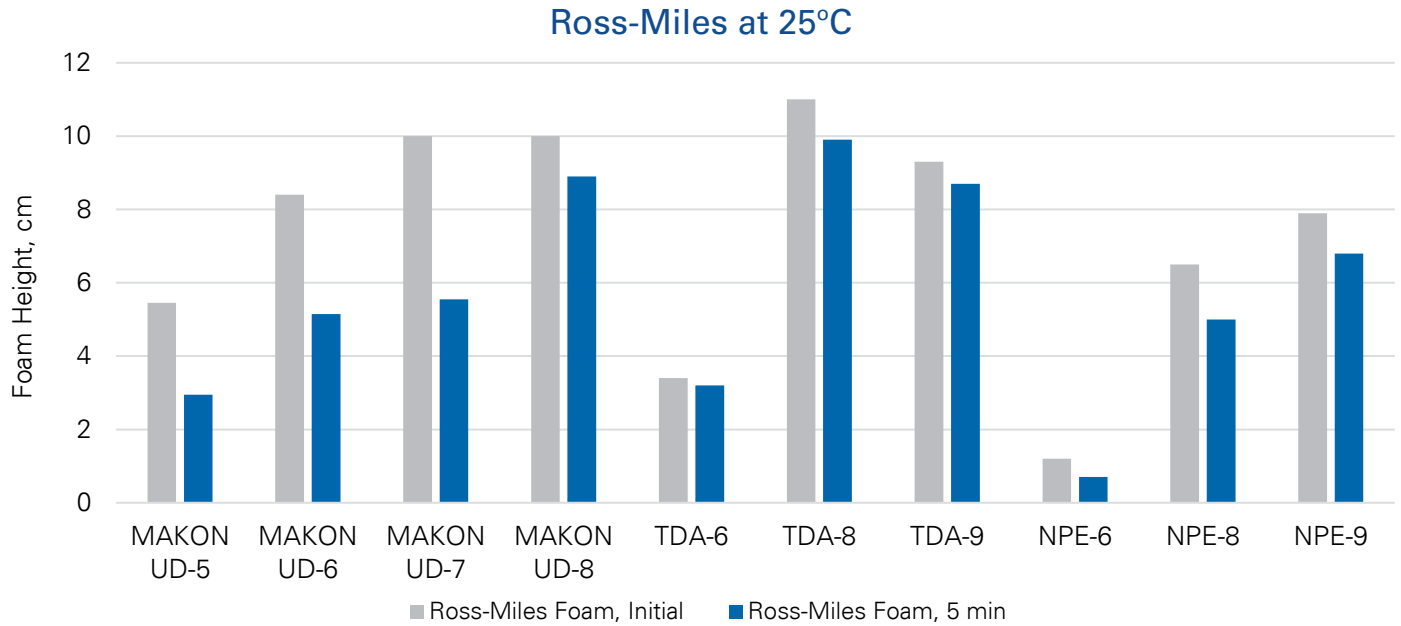

Method: Ross-Miles Foam Test, Stepan Method 010-0 (ASTM D1173-53, 2001), 0.1 wt% in deionized water

Heavy Duty Degreasing

MAKON UD-5 and **MAKON UD-6** are effective degreasers that cut through industrial-type soils.

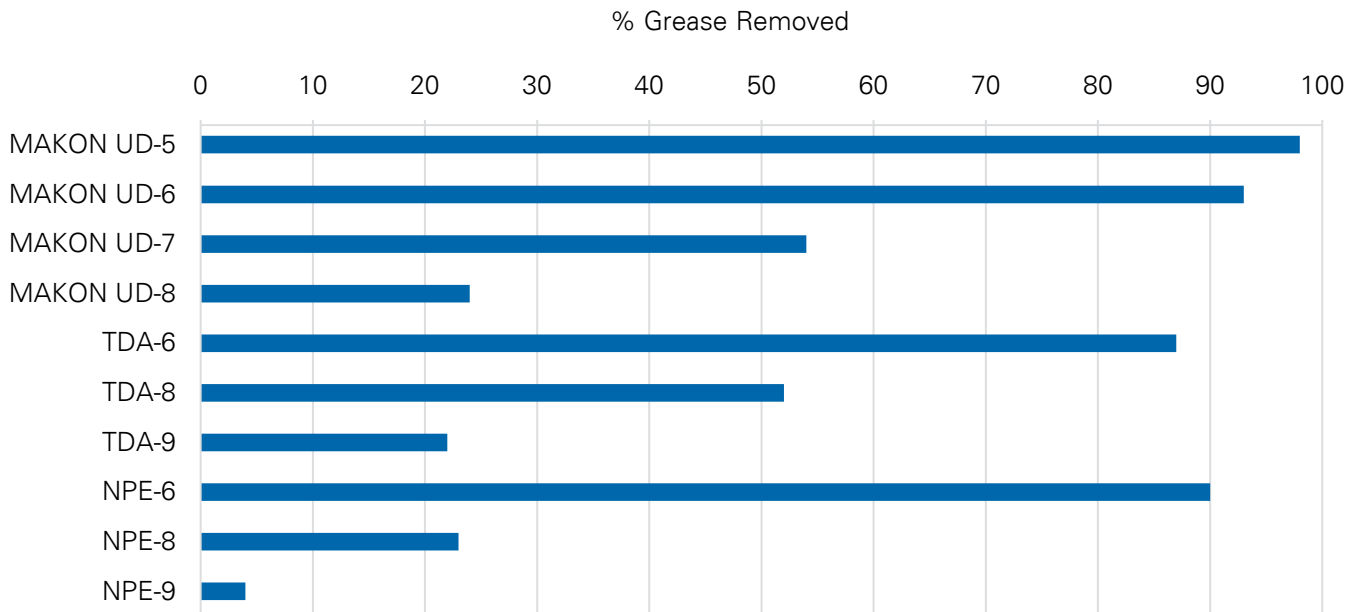

Method: Immersion degreasing, lithium grease/used motor oil (50/50 by wt%), stainless steel, 22°C, 1000 RPM, 30 min, gravimetric analysis, required HLB for lithium grease (mixture of lithium stearate and lithium hydroxystearate) = 15 and petroleum oils = 10

Formulation: 1 wt% nonionic, 1 wt% potassium hydroxide (45%), 1 wt% sodium metasilicate

Solubility

Tradename	Deionized Water	Ethanol (>99%)	Isopropanol	Methanol	Ethylene Glycol	Propylene Glycol	Toulene	Kerosene	Mineral Oil (light)	Xylene	Perchloroethylene
MAKON UD-5	Dispersible, <10	>10	>10	>10	>10	>10	>10	Insoluble	Insoluble	>10	>10
MAKON UD-6	>10	>10	>10	>10	>10	>10	>10	Insoluble	Insoluble	>10	>10
MAKON UD-7	>10	>10	>10	>10	>10	>10	>10	Insoluble	Insoluble	>10	>10
MAKON UD-8	>10	>10	>10	>10	>10	>10	>10	Insoluble	Insoluble	>10	>10

Solutions evaluated at 25°C.

<10 indicates the surfactant forms a clear solution at less than 10 wt% in solvent.

>10 indicates the surfactant forms a clear solution at greater than 10 wt% in solvent.

Insoluble indicates the surfactant does not form a clear solution at 1 wt% or lower, and a bilayer is observed.

Dispersible indicates that a hazy solution is formed but no separation occurs.

Typical Properties

	MAKON UD-5	MAKON UD-6	MAKON UD-7	MAKON UD-8
Applications	I&I Cleaning, Wetting Agent	I&I Cleaning, Wetting Agent	I&I Cleaning, Fragrance Solubilizing, I&I Laundry, Wetting Agent	Fragrance Solubilizing, Wetting Agent
NPE Equivalent	NPE-6	NPE-8	NPE-9	NPE-10
TDA Equivalent	TD-6	TD-8	TD-9	TD-9
HLB	10.9	11.9	12.8	13.2
Molecular Weight, g/mol	394	438	482	525
Actives, %	100	100	100	100
Cloud Point, °C (°F), (1% aqueous)	<10 (50)	35 (95)	53 (128)	64 (147)
Cloud Point, °C (°F), (5g in 25g BDG ¹ 25%)	63 (145)	69 (156)	74 (165)	77 (171)
Pour Point, °C (°F)	4 (40)	9 (49)	12 (54)	12 (59)
Surface Tension (0.1% aqueous), dynes/cm	26.8	26.8	26.9	27.2
Critical Micelle Concentration, mg/L	198.2	251.4	304.6	357.8
Draves Wetting at 25°C (0.1 wt% aqueous), seconds	3	3	3	4
Ross-Miles, 0.1 wt%, Initial, cm	5.5	8.4	10.0	10.0
Ross-Miles, 0.1wt%, 5 min, cm	3.0	5.2	5.6	8.9

¹ BDG = Butyl Carbitol

Visit www.stepan.com/alkoxylates for Stepan's full product portfolio.

For further information, contact North America Technical Service at techserv@stepan.com or (800) 745-7837.

2018 © Stepan Company. All Rights Reserved.

MAKON® is a registered trademark of Stepan Company.

The information contained herein is based on the manufacturer's own study and the works of others and is subject to change without prior notice. The information is not intended to be all-inclusive, including as to the manner and conditions of use, handling, storage or disposal or other factors that may involve additional legal, environmental, safety or performance considerations. Nothing contained herein grants or extends a license, express or implied, in connection with any patents issued or pending of the manufacturer or others, or shall be construed as a recommendation to infringe any patents. STEPAN COMPANY MAKES NO PRODUCT WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR USE, EXPRESS OR IMPLIED, AND NO OTHER WARRANTY OR GUARANTY, EXPRESS OR IMPLIED, IS MADE, INCLUDING AS TO INFORMATION REGARDING PERFORMANCE, SAFETY, SUITABILITY, STABILITY, ACCURACY, COMPLETENESS, OR ADEQUACY. Stepan Company (and its employees, subsidiaries and affiliates) shall not be liable (regardless of fault) to the vendee, its employees, or any other party for any direct, indirect, special or consequential damages arising out of or in connection with the accuracy, completeness, adequacy, furnishing, use, or reliance upon information provided herein. The vendee assumes and releases Stepan Company (and its employees, subsidiaries and affiliates) from all liability, whether in tort, contract or otherwise to the fullest extent possible under the relevant law.

December 2018